



The 3rd International Conference on  
"Computational Mechanics  
and Virtual Engineering"  
COMEC 2009  
29 – 30 OCTOBER 2009, Brasov, Romania

## HEATING RADIANT SYSTEMS USING ADVANCED COMPOSITE MATERIALS AS RESISTIVE ELEMENT

D. Rosu<sup>1</sup>, I. Goia<sup>2</sup>, S. Vlase<sup>3</sup>, H. Teodorescu-Draghicescu<sup>4</sup>

<sup>1</sup> Compozite Ltd., Brasov, ROMANIA, e-mail: [compozitebv@yahoo.com](mailto:compozitebv@yahoo.com)

<sup>2</sup> Transilvania University of Brasov, ROMANIA, e-mail: [goia.i@unitbv.ro](mailto:goia.i@unitbv.ro)

<sup>3</sup> Transilvania University of Brasov, ROMANIA, e-mail: [svlase@unitbv.ro](mailto:svlase@unitbv.ro)

<sup>4</sup> Transilvania University of Brasov, ROMANIA, e-mail: [draghicescu.teodorescu@unitbv.ro](mailto:draghicescu.teodorescu@unitbv.ro)

**Abstract:** The paper presents heating radiant systems manufactured at COMPOZITE Ltd., Brasov, Romania, from advanced composite materials as well as two 3D micro structural models of polymer matrix composites with conductive spherical particles and non-deformed flakes as fillers. The description of heating radiant systems for public and industrial buildings, including the heating principle, is also presented. These heating radiant systems provide clean and advantageous heat, are energetically efficient and lead to conformity with the procedures of IGEF-Internationale Gesellschaft für Elektrosmog-Forschung (International Society for Electronic Smog Research), regarding the electronic smog. The main feature of these heating radiant systems is that the energy transfer does not accomplish through air (convection), but through electromagnetic waves (radiation), namely the air between the heat bearer and its receiver does not heat.

**Keywords:** percolation, conduction, convection, radiation, heating

### 1. INTRODUCTION

The phenomena of passing electric current through organic polymer matrix composites with powders and/or conductive fibres differs from the electronic conduction through metals and is described by the percolation theory [1], [2]. According to this theory, the electric conduction is accomplished through proximity, at micro level there are no homogeneous distribution of conductive phase in polymeric matrix. This conductive phase finds itself at micro level as a conglomerate of conductive micro zones. Between micro zones, the conduction occurs through mechanisms that are specific to insulated polymers. For instance, these conductive mechanisms can be the existence of loads in traps, the displacement of mobile carriers, etc., so that the electric conduction phenomenon in these materials is in general, more complex [3]. Attempts to accomplish some heating radiant systems made from composite materials have been made at COMPOZITE Ltd Brasov, Romania, since 1994 for different prototype applications. Thus, these were applied at the heating of 6 cleaning baths for syringe needles with ultrasounds, the heating of a pickling bath (8 m<sup>3</sup>) with bimetal strips of bearing (customer ROMLAG SA Brasov, Romania), the heating of 20 shelters of electric generator group CONNEX (customer VODAFONE, Romania) in year 1998/1999 as well as the heating of different public buildings. At international level, there are some companies in Germany and Austria that produce THERMOCARB heating radiant systems, but they are based on other constructive principle of the resistive element, namely with special threads isolated with silica. All systems that heat prevalent the air (convection) works according to the air circulation principle. The air heats, rises and takes cold air that heats itself, and so on. In this case, in the room it forms an air circuit through which become possible the room heating. As strong the air heats, as much stronger will be the moisture loss (the necessary air moisture) and the dust trouble from the room, pollen, bacteria and allergenic elements. These involve themselves in air and distribute themselves continuously in the whole room. The result: a high air temperature as well as dry and drossy air. This has an extreme injurious effect on the human body.


### 2. THE SOLUTION

The new generation of heating radiant systems made from advanced composite materials have as main purpose the heating of public buildings (restaurants, exhibitions, courses halls, schools, kindergartens, festive halls, sport halls, shops, etc.), residential buildings and at industrial consumers with accent on the increase of their energetic efficiency.

That's why, the products will be with a high finishing degree, with pleasant aspect and of faultless quality. Some constructive architectures of heating radiant systems are presented in figs. 1 and 2.



**Figure 1:** Heating radiant system for industrial applications

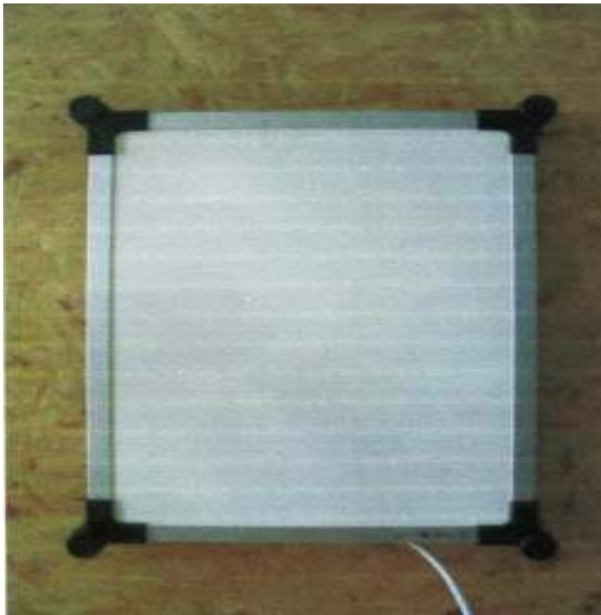

**Figure 2:** Heating radiant systems for residential and public buildings

In general, the heating radiant systems are composed from the following parts:

- Frame manufactured from steel that can be electrostatically painted or coated;
- Front side which can be manufactured from aluminium;
- Heating resistive element, 100% original, made from advanced composite materials;
- Thermal insulator;
- Rear side which can be manufactured from aluminium;
- Thermostat;
- Supports – 4 pieces;
- Power cable.

The frame can be from stainless steel, aluminium or painted in electrostatic field at the request colour. The front radiant side is also made from aluminium which can be natural or painted in electrostatic field. The heating radiant system works at 230 V and has a power of 1000 W. Within a national project, the following types of experimental models of heating radiant systems made from advanced composite materials are intended to be manufactured:


- 300 x 500 x 32 mm – for a heating volume of up to 8 m<sup>3</sup>;
- 1000 x 300 x 32 mm – for a heating volume of 20 m<sup>3</sup>;
- 600 x 500 x 32 mm – for a heating volume of 20 m<sup>3</sup>;
- 1000 x 600 x 32 mm – for a heating volume of 40 m<sup>3</sup>;
- 1200 x 800 x 32 mm – for a heating volume of 80 m<sup>3</sup>.

### 3. THE HEATING PRINCIPLE

The electric energy is transformed in thermal energy produced by the heating resistive element. This transfers the heat to the environment through thermal radiation (thermal waves), the heating principle being similar to the sun. The heat transfer does not accomplish through air, but through walls-, objects from surroundings and through the human body heating. The air heats due to the objects- and wall heating and not due to the heat taking over by the air streams on the heating plate surface. From the physiologic point of view, the heating through radiation is more natural for human beings also. Human body can take over, through skin, 99% from the thermal radiation at which is exposed by sun radiation, its body constitution being oriented to it. The warm and cold sensation does not depend on the environment air temperature. For instance: persons being in a room with warm air at 50°C and cold walls, almost “freeze”, as well with an air at 10°C and warm walls, they “sweat”.


### 4. MODELS OF CONDUCTIVE FILLERS

In general, the matrix of these materials is dielectric and provides mechanical adhesion, while the conductive fillers give electrical conductivity through connections accomplished between particles. The particles' arrangement and the way in which they connect each other are very important in determination of electric properties, respective electrical resistivity of conductive matrices. To describe a micro structural 3-D model of a conductive matrix with spherical particles it is necessary to know some information about filler. First important information is that the shape of particles determines the microstructure and the interconnections between particles. The second important information is that the filler's volume fraction must be above the percolation threshold [4]. For simplification, a polymeric matrix with conductive filler with uniform spherical particles is considered. If the spheres' radius and the filler's volume fraction are known, to accomplish the model is necessary to determine the particles position or the coordinates of spheres' centre in 3-D space. A very simple model is the Boolean one. Since the matrix presents a high viscosity and the conductive filler is completely mixed with the matrix, a uniform distribution of particles in matrix can be considered, so that the number of particles is the same in any volume unit of the conductive matrix. An example of micro structural model for a polymer matrix composite with conductive spherical particles as filler is presented in fig. 3. The dimensions of the considered representative volume element (RVE) are 15 x 15 x 15 μm<sup>3</sup>, the sphere's radius is 1 μm and filler's volume fraction is 25% [5].

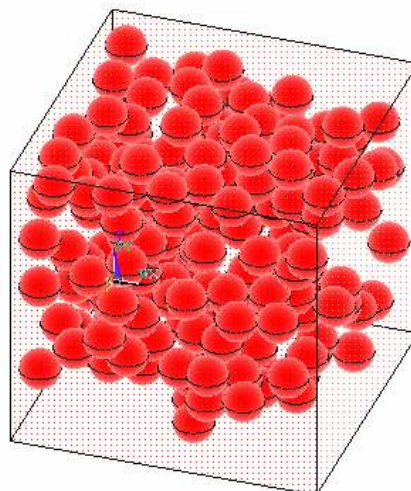

**Figure 3:** Model of a polymer matrix composite with conductive spherical particles as filler [5]

Another type of micro structural model is for polymer matrix composites with conductive particles in form of flakes as filler (fig. 4). In this model it is supposed that the flakes are stiff and they do not bend, so, no flakes' deformation occurs. Since the flakes' thickness is much smaller than their length and width, they can be easily deformed when they come in contact. Some averaging methods in the micromechanics of composite materials with periodic structure can be used to model the resistive element [6].

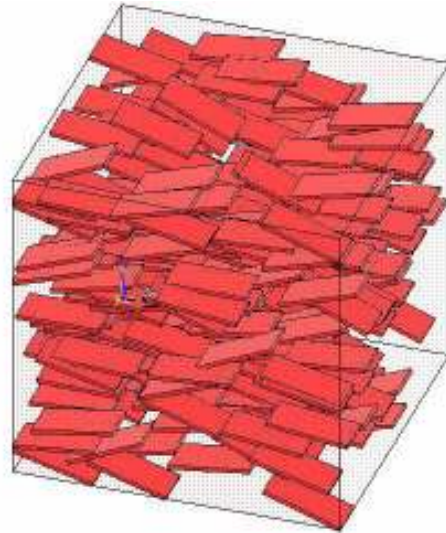

**Figure 4:** Micro structural model of a PMC with conductive non-deformed flakes as filler [7]

## 5. CONCLUSIONS

By help of the layers made from advanced composite materials, heat conductive, a more clean heat is obtained, more advantageous and spends more energy. Despite convection, at the heat radiation, the energy transfer does not accomplish through air, but through electromagnetic waves, namely the air between the heat bearer and its receiver does not heat. The complexity of these heating radiant systems results from the researches to find complex constructive solutions that lead to the conformity with the stipulations of IGEF-Internationale Gesellschaft für Elektrosmog-Forschung (International Society for Electronic Smog Research). The heating radiant systems made from advanced composite materials are extreme complex having an extraordinary know-how incorporated from the field of materials science (advanced composite materials based on synthetic resin reinforced with special fibres, powder materials, materials with remarkable electric properties), physics (the concept of thermal radiation through heat waves, radiation spectrum, etc.), thermodynamics and thermo technique. These products are also complex through their manufacturing technology of the composite resistive element, being necessary various manufacturing processes like: moulding at a well established pressure and temperature of the resistive stack in the hot mould press as well as the homogenization process of the powders in the matrix of the composite material.

## REFERENCES

- [1] Stauffer, D., Aharony, A.: Introduction to percolation theory, CRC Press, 1994.
- [2] Cornett, V., Ramirez-Pastor, A.J., Nieto, F.: Percolation of polyatomic species on a square lattice, *The European Physical Journal B – Condensed Matter and Complex Systems*, Vol. 36, No. 3, 2003, pp. 391-399.
- [3] Bin Su: Assembly and Reactivity of Nanoparticles at Liquid/Liquid Interfaces, PhD thesis, École Polytechnique Fédérale de Lausanne, 2006. Available from: <http://library.epfl.ch/theses/?nr=3535>.
- [4] Wu, Y., Schmittmann, B., Zia, R.K.P.: Two-dimensional polymer networks near percolation. *Journal of Physics A: Mathem. and Theoretical*, Vol. 41-025004, Issue 2, January 2008.
- [5] Tummala, R., Kosec, M., Kinzy Jones, W., Belavic, D.: Electronic Packaging for High Reliability, Low Cost Electronics, Springer, 2000.
- [6] Teodorescu-Draghicescu, H., Vlase, S., Candea, I., Motoc, D.L.: Some averaging methods in the micromechanics of composite materials with periodic structure, *Proceedings of the 10<sup>th</sup> WSEAS Int. Conf. on Automatic Control, Modelling & Simulation (ACMOS'08)*, Istanbul, May 2008, pp. 210-214.
- [7] Zohdi, T.I., Wriggers, P.: Introduction to Computational Micromechanics, (Lecture Notes in Applied and Computational Mechanics), Springer, 2008.